


RME1

Analog Acquisition Modules



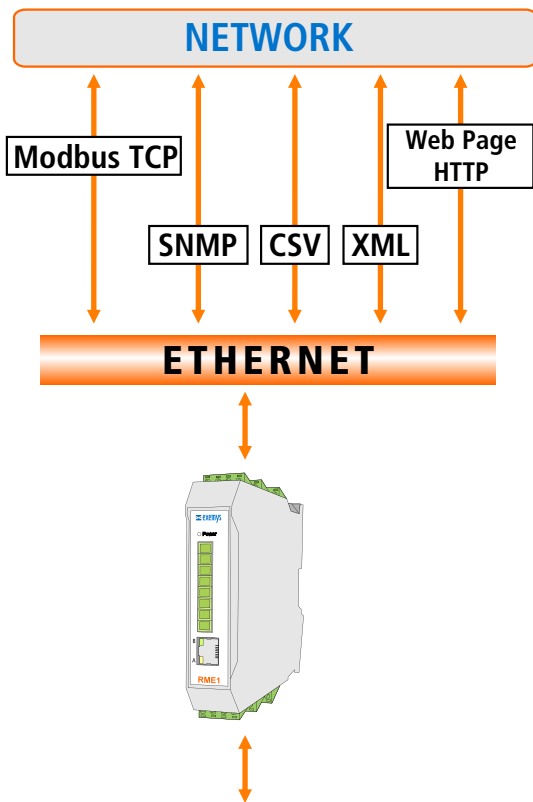

Analog Acquisition Modules with multiple Communication Protocols.



With RME1 you can acquire analog variables through the network in an accurate and unexpensive way. The devices can convert Current, Voltage and Temperature. These variables can be read in five different ways simultaneously. (Modbus TCP, Web Page, SNMP, XML, CSV file).

FEATURES

- 8 analog differential inputs
 - Current, 4-20mA (12 bits)
 - Voltage, 0-10Volts (12 bits)
 - Temperature, PT100 (0.1 °C)
 - Temperature, Thermocouple J, K, T, R, N, E, S (0.1 °C)
- Protocols
 - ModbusTCP (up to 8 simultaneous connections)
 - Web Page (HTTP)
 - SNMP (V1)
 - XML (HTTP)
 - CSV (HTTP)
- Wide Range of Power Supply, from 10 up to 30 Vdc
- Easy configuration
- Industrial pluggable terminal blocks
- DIN Rail mounting

			
Thermocouple J,K,T,R,N,E,S	PT100	Current 4-20mA	Voltage 0-10Vdc
RME1-TC	RME1-PT	RME1-AI	

EXAMPLES OF USE

- Analog sensors general systems
- Remote systems monitoring
- Industrial automation
- PLCs and SCADA systems
- Data centers monitoring



General Specifications

- **Network Interface:** Ethernet 10BaseT, connector RJ45
- **Network Protocols:**
 - TCP / IP, ICMP, ARP, DHCP, NBNS, TELNET
 - HTTP
 - Modbus TCP
 - SNMP (version 1)
- **Serial Port:** RS232 serial port in pluggable terminal blocks for device configuration.
- **Management:**
 - HTTP Server, password protected.
 - Telnet console, password protected.
 - Serial console.
- **Indicators:** Power Led, Data Led, Link Led.
- **Power Supply:**
 - 10 a 30 Vdc.
 - Current sink: 200mA @ 10 Vdc
 - 90mA @ 30 Vdc.
- **Dimensions / Weight:** 100mm x 22,5mm x 112mm (Height x Width x Length).
- **Temperature:**
 - Operating temperature: -5 a 65°C
 - Storage temperature de : -40 a 75°C
- **Warranty / Support:** 1 year warranty. Technical support included.

Particular Specifications

MODEL	INPUT TYPE	RESOLUTION	SAMPLING
RME1-AI	4-20mA / 0-10Vdc	12 Bits	100ms per channel
RME1-TC	Thermocouple J, K, T, R, N, E, S	0,1°C	200ms per channel
RME1-PT	PT100	0,1°C	200ms per channel

ORDERING INFORMATION

PART NUMBER	INPUTS	PROTOCOLS	SERIAL PORTS
RME1-AI-100-00-80-IA3	8	See specifications	1 RS232 (*)
RME1-TC-100-00-80-IA3	8	See specifications	1 RS232 (*)
RME1-PT-100-00-80-IA3	8	See specifications	1 RS232 (*)

(*) Configuration serial port

QUALITY MANAGEMENT SYSTEM ISO 9001:2000



For technical support please contact:
support@exemys.com

For sales please contact:
sales@exemys.com

www.exemys.com

Exemys products are in constant evolution to satisfy our customers needs. For that reason, the specifications and capabilities are subject to change without prior notice. Updated information can be found at www.exemys.com
Copyright © Exemys. All Rights Reserved. R2.00