

Modbus Multiplexer

SGW1-IA2-MMP




SGW1-IA2-MMP will allow you connect up to 3 Modbus ASCII/RTU masters to your Modbus ASCII/RTU slaves transparently.

If you have to connect Modbus slaves to more than one master, you need a device like the SGW1-IA2-MMP. SGW1-IA2-MMP buffers the master's polls giving them priorities, depending which of them came first, and then sends them to the slaves. Each serial port can be configured with a different baud rate, parity and Modbus protocol (ASCII or RTU). So it is also possible to use SGW1-IA2-MMP as a converter. Each serial port can be configured individually to connect Masters or Slaves.



FEATURES

- Up to 3 ports to connect Masters.
- Up to 3 ports to connect Slaves.
- No need of registers tables.
- It can be use as a Modbus RTU to Modbus ASCII converter.
- Wide range power supply 9 to 30 VDC, 9 to 26 VAC.
- Easy configuration.
- Industrial pluggable terminal blocks.
- DIN Rail mounting (optional).

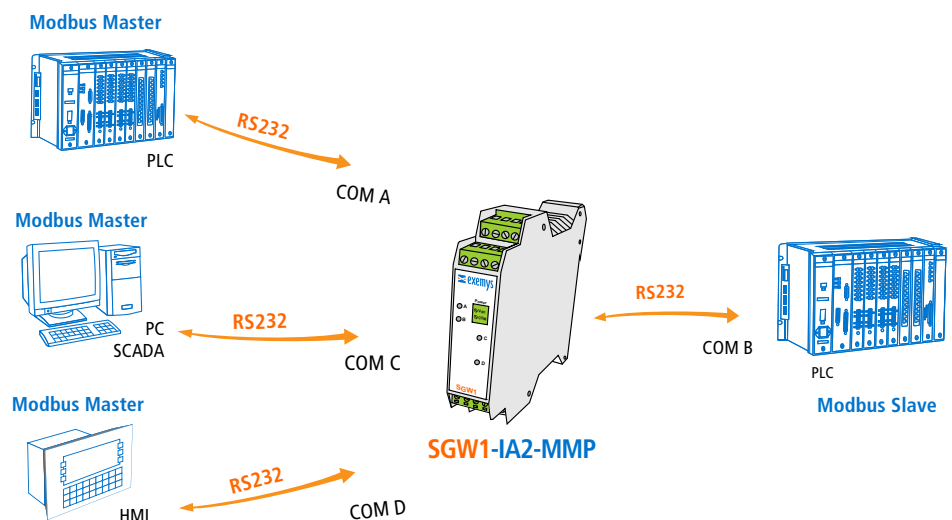


SGW1-IA2-MMP




SPECIFICATIONS

SGW1-310-00-IA-MMP

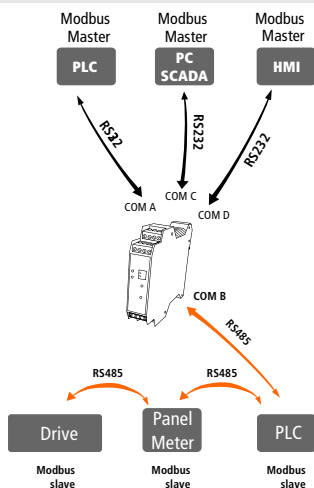

SGW1-400-00-IA-MMP

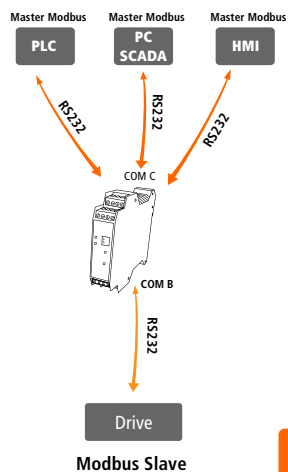

- **Serial Protocols:** Modbus RTU / ASCII / ASCII 8 bits
- **Serial Interface:** RS232, DB9 Male connector (DTE).
RS232 & RS485 in puggable terminal blocks.
- **Devices Supported:** Any Modbus RS232/RS485 serial port device.
- **Baud Rates:** 1200, 2400, 4800, 9600, 14400, 19200, 28800, 38400, 57600, 115200
- **Modbus Masters:** Up to 3 ports for master devices.
- **Modbus Slaves:** Up to 3 ports for slave devices.
- **Management:** RS232 serial console.
- **Indicators:** Data to slave.
Data from slave.
- **Dimension / Weight:** 4.49 x 3.94 x 0.89 in. (HxWxL).
(114 x 100 x 22.5 mm).
0.31 Lbs (0.140 Kg).
- **Power Supply:** 9 to 30 Volts DC
9 to 26 Volts AC
200 mA max.
- **Environmental:** Operating temperature: 23 to 149 °F (-15 to 65 °C).
Storage temperature: -40 to 167 °F (-40 to 75 °C).
- **Optional Accessories:** DIN rail mount.
- **Guarantee / Support:** 1-year limited guarantee. Technical Support included.



ORDERING INFORMATION

PART NUMBER	SERIAL PORTS	
	RS232	RS485
SGW1-310-00-IA2-MMP	3	1
SGW1-400-00-IA2-MMP	4	---
SGW1-130-00-IA2-MMP	1	3

ISO 9001:2008



GESTION DE LA CALIDAD

RI-9000-6174



For technical support please contact:
support@exemys.com

For sales please contact:
sales@exemys.com

Exemys products are in constant evolution to satisfy our customers needs. For that reason, the specifications and capabilities are subject to change without prior notice. Updated information can be found at www.exemys.com
Copyright © Exemys. All Rights Reserved.